


TRUSPEED® Se

RUGGED. COMPACT. AFFORDABLE. VERSATILE.



FEATURES

- Seamlessly integrates with PicoDigiCam
- Able to accept battery power from external sources
- Rugged exterior with tactile grips
- In-scope data and menu display
- Speed limit edit function with audible recognition (for countries where applicable)

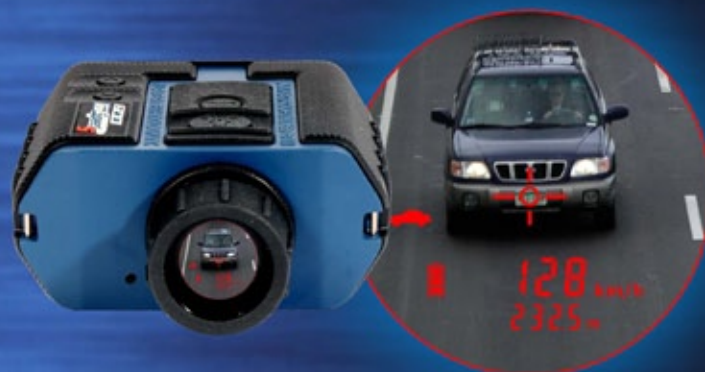

TruSpeed Se with PicoDigiCam for a complete photo/video speed enforcement system



Includes:

- Carrying case
- Neck strap
- Eyepiece cover
- 2 CR 123A batteries
- Operator's manual

SPECIFICATIONS

Weight: 0.41 kg
Size: 13.2 x 11.4 x 5.3 cm
Construction: Glass-filled polycarbonate composite
Maximum Range: 610 m
Speed Range: ± 320 km/h
Range Accuracy: ± 15 cm
Speed Accuracy: ± 2 km/h
Environmental: Water-resistant; NEMA 4 & IP 55

Battery Power: (1) CR 123A battery
 12 hours of operation time
External Power Input: 8 to 12 volts dc (typical),
 5 to 20 volts dc (maximum)
Temperature Range
Operating: -30° to 60° C
Storage: -35° to 70° C
Eye Safety: Class 1/FDA CFR 21;
 Europe IEC-60825-1

All specifications are subject to change without notice (Rev 8.13)